


## Eurovent **AKTIVBAND**

Sealing tape with high Sd coefficient for internal use. The film is coated on both sides with special nonwoven fabric that provides optimal performance of the adhesive and makes plastering and final processing easier. Equipped with an adhesive strip which facilitates its application and a butyl ribbon, with which they are fastened to the wall, which in turn allows to eliminate or reduce the need for extra adhesive.

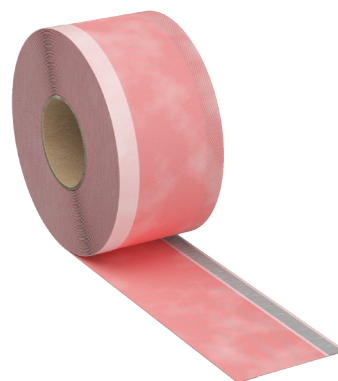

### Advantages:

- vapour insulating
- UV resistant
- flexible and easy to install
- prevents uncontrolled air flow

### Technical data:

Parameter	Harmonized technical specification	Value
Water tightness	EN 1027	Class 9A
Vapour permeability	EN 12572	Sd ≥ 55 m
Flammability class	EN 13501-1	B
Adhesion of the adhesive tape	EN 1939	0,5 N/mm
Tensile strength	EN 12311-3	≥ 7 Mpa
Tear strength	EN 12311-3	≥ 50%
Air permeability	EN 1026	class 4
UV Resistance		1 year
Shelf life		1 year
Available widths		70, 100, 150 mm x 25 m
Package – quantity per box		1 roll
Quantity per pallet		484, 360, 240 rolls
Application temperature		from +5 to +35°C
Storage		in a dry place at a temperature of +1 to +25°C

*Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.*


Product information can be found on the website: [www.eurovent.de](http://www.eurovent.de)

Update date: 2/2016

## Eurovent **AKTIVBAND**

### Application:

For the installation of windows and doors in a way that ensures their tightness for many years. Dedicated for the insulation of connections inside the building. Special adhesive strip ensures easy installation of the foil and butyl ribbon facilitates fastening of the tape to wall which eliminates the need of using additional adhesive.

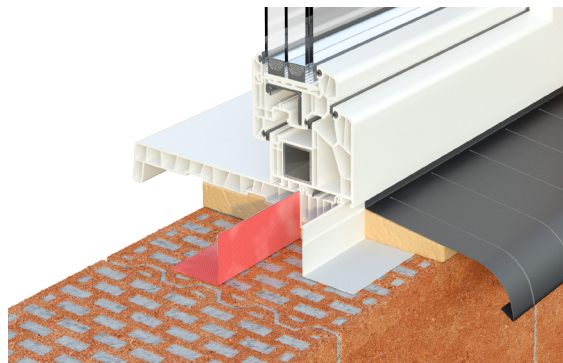

### Storage / transport:

The product should be stored in a dry place, under cover, free from moisture and UV radiation in original undamaged and closed package. Rolls should be transported in covered means of transport. They should be prepared for transport in a manner that protects them from damage and destruction. During transport safety regulations must be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of foil or permanently damage it.

The product is under warranty, providing that the guidelines contained in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

*Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.*

Product information can be found on the website: [www.eurovent.de](http://www.eurovent.de)

Update date: 2/2016