


Eurovent BITUVENT

Ridge ventilating element designed for application with bitumen shingles. Made of high-quality plastic and stabilized against UV radiation. Product ensures proper ventilation in the ridge area and protects it against penetration of moisture and dirt.

Advantages:

- UV resistance
- fast and easy application
- effective ventilation

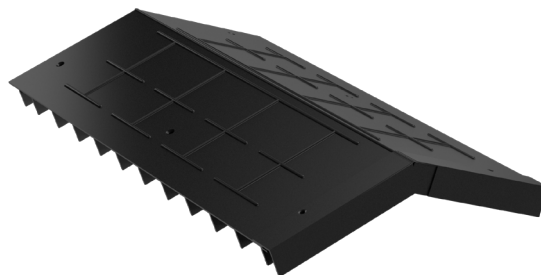

Technical data:

Parametr	Value
Materiał	polimer
Rozmiar	1000 x 290 mm
Odporność na UV	odporny
Temperatura mięknięcia wg PN-EN ISO 306:2006 /B50	$\geq 75\text{ }^{\circ}\text{C}$
Wytrzymałość na rozciąganie udarowe wg PN-EN ISO 8256:2006	$\geq 600\text{ kJ/m}^2$
Gęstość wg ISO 1183/C	0.905 g/cm^3

Parametr	Value
Wskaźnik MFR wg ISO 1133	15 g/10 min
Kolory RAL	czarny 9005
Waga profilu	ca. 1 kg
Karton	10 sztuk
Paleta	100 sztuk
Powierzchnia wentylacyjna	$400\text{ cm}^2/\text{m}$

Application:

Product is designed for use as sealing and ventilating element for roof ridges and hips. Dedicated for application with bitumen shingles. It protects the roof covering against penetration of snow, rain, moisture and dust while ensuring proper air circulation within roof covering.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015

Eurovent **BITUVENT**

Storage / transport:

The product should be stored in a dry place, under cover, free from moisture and UV radiation in original undamaged and closed package. The product should be transported in covered means of transport. They should be prepared for transport in a manner that protects them from damage and destruction. During transport safety regulations must be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of foil or permanently damage it.

The product is under warranty, providing that the guidelines contained in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015