


Eurovent FLEX LINE

Aluminum chimney strip for closing chimney flashing. Made of high-quality aluminum and profiled to ensure easy installation and tight adhesion to the chimney. Product provides effective sealing and esthetic appearance of the finishing works.

Advantages:

- resistance to water and cold
- unique flexible composition
- UV resistance

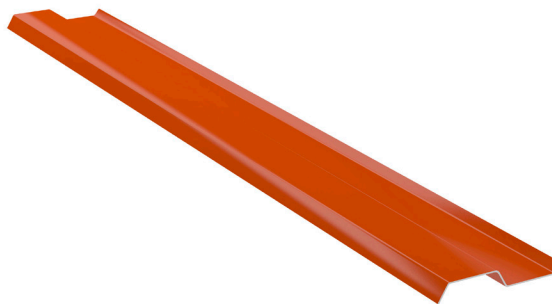

Technical data:

Parameter	Value
Material	Profiled aluminum plate
Aluminum	Lacquered aluminum plate, thickness approx. 0,58 mm
Lakier	Polyester varnish with protective film
Width	80 mm
Length	2000 mm (1000 mm available on special order)
Colors	wallred RAL 8004, brown RAL 8019, black RAL 9005, anthracite RAL 7021, chestnut RAL 8015, cherry RAL 3011, brown RAL 8017 (available on special order)
Box	20 pieces
Pallet	100 boxes = 2000 pieces

Application:

Strip designed for use as finishing element for chimney flashing. Ensures proper sealing of the critical spots around chimney and esthetic finishing of the roof works.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 01/2016

Eurovent **FLEX LINE**

Montage:

Installed on the edge of chimney flashing tape with the use of fast screws. Application of roof sealant is recommended to ensure water-tightness of the upper part.

Storage / transport:

The strip should be stored in a dry place, under cover, free from moisture and UV radiation. The strip are made partially from elastic aluminum- please store in original, closed boxes. Please protect from damages. Strips should be transported in covered means of transport. They should be prepared for transport in a manner that protects them from damage and destruction. During transport safety regulations must be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of foil or permanently damage it.

The product is under warranty, providing that the guidelines contained in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 01/2016