


Eurovent FLEXBIT

Bitumen roofing tape for sealing and finishing works in flat and sloping roofs. Suitable for multiple applications and available in different colours. Bitumen-based and solvent-free product coated with a layer of aluminum.

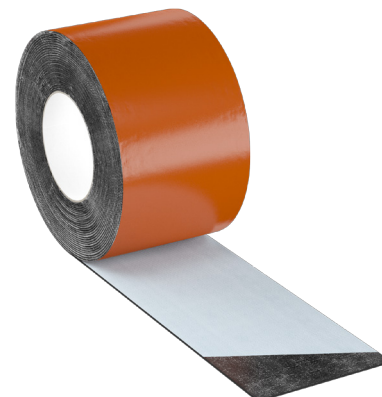

Advantages:

- high adhesive strength • solvent-free • water-tightness
- highly resistant to aging • stabilized against UV radiation

Technical data:

Parameter	Value
Material	Bituminous glue and aluminum foil
Width of protection	Available sizes: 100 mm, 150mm, 200mm, 300mm
Length	10 rm/roll
Thickness	1,0+- 0,2 mm
Kolor RAL	dark red 3004, wallred 8004, brown 8019, aluminium 9006, graphite 9007
UV resistance	resistant
Application temperature	5°C - 35°C

Parameter	Value
Temperature resistance	-30°C - 80°C
Tensile resistance	> 200N
Fire resistance	Class E
Vapor permeability	> 1500m
Tear resistance	20 – 40 N
Roll's weight	ca. 1,25 kg; ca. 2 kg; ca. 3,75 kg
Package	3 rolls (width 100 mm); 2 rolls (width 150 mm); 1 rolls (width 300 mm)
Pallet	96 cardboards

Application:

Used for sealing the areas of chimney, skylights, roof valleys and ventilation components for flat and pitched roofs. Ideally combines all kinds of metal parts with other plastics, concrete and brick. Often used with chimneys and other protruding above the roof surface. Please note that the glued surfaces are free from dust, grease and other contaminants. In case of doubt as to the quality substrates to be bonded must carry out a gluing test. Eurovent® FLEXBIT tape is resistant to aging, weather conditions, temperature changes and UV radiation.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015

Eurovent **FLEXBIT**

Storage / transport:

The product should be stored in a dry place, under cover, free from moisture and UV radiation in original undamaged and closed package. Rolls should be transported in covered means of transport. They should be prepared for transport in a manner that protects them from damage and destruction. During transport safety regulations must be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of foil or permanently damage it.

Other recommendations:

- immediately after the operation, trim and roll the tape, because after a few hours bitumen layer could harden
- avoid prolonged, direct contact with the skin.

The product is under warranty, providing that the guidelines contained in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015